
GVL 8408-M

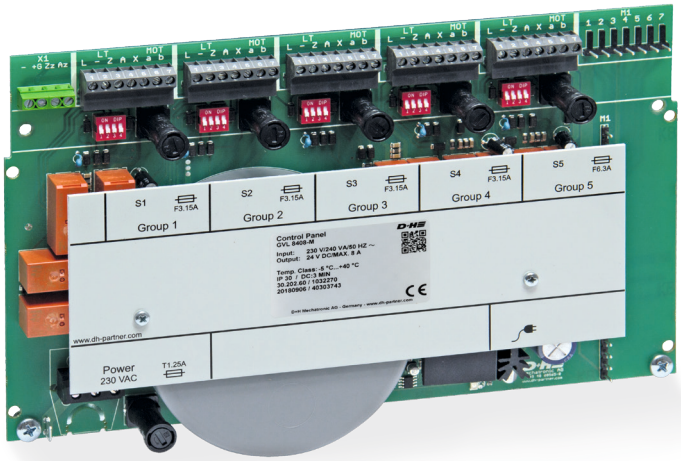

Performance features


- Expandable ventilation control panel
- For controlling 24 V DC window drives
- Up to 8 A total drive current
- Stabilised output voltage
- 5 ventilation groups (with optional GME 83, can be expanded to 6 groups)
- Input for external controller, e.g. timer
- Configurable ventilation safety function (storage operation OPEN / CLOSED)
- Weather automation for individual groups can be switched on / off
- Comfort ventilation functions using additional modules

Accessories

Plastic housing	Modules	Operation elements	Weather sensors
			

We reserve the right to make changes.
©2020 D+H Mechatronic AG, Ammersbek

Example of application

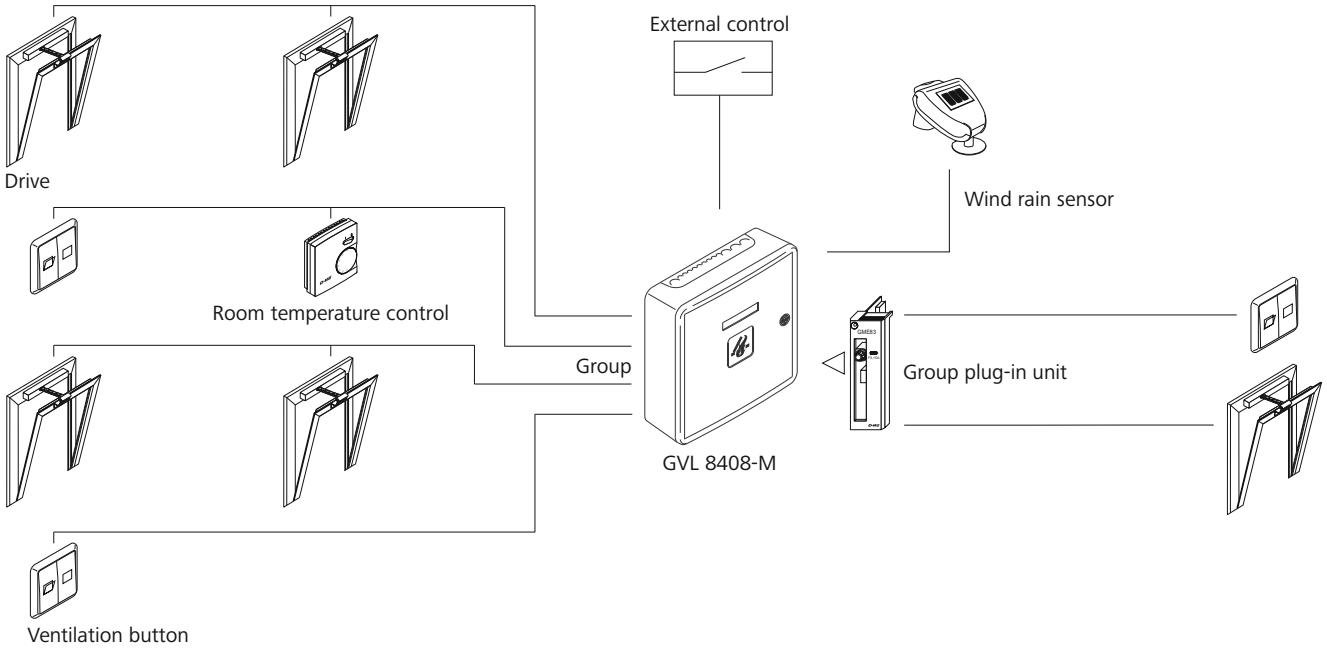

Technical data

	GVL 8408-M
Supply	230 V AC / 50 Hz / 240 VA
Stand-by power	2.5 W
Output	24 V DC / 8 A
Mode of operation	Short-time duty 20 % duty cycle
Temperature range	-5 °C ... +40 °C

Approvals / Certificates

Article also available with the following permissions under other article numbers. Technical data may deviate. Find out about permission details from your D+H Partner.

c UL us

Design

Type	Art. No.	Type of protection	Colour	W x H x D	Weight	Remark
ZP-GVL 8408-M	30.202.60				5.60 kg	
GEH-KST	63.600.81	IP 30	White (~ RAL 9016)	310 x 310 x 100 mm	1.40 kg	Plastic housing
GVL 83xx-E	30.208.00					Variable equipment possible