PS-VE4



Performance features

- External compact power supply unit, 230 V AC
- For controlling 24 V DC drives
- For controlling 24 V DC BSY+ drives
- BSY+ bus signals can be looped through
- Up to 4 A total drive current
- Activation, e.g. using 230 V AC ventilation button
- Surface-mounted design

Accessories

Operation elements




Weather sensors



We reserve the right to make changes.
©2020 D+H Mechatronic AG, Ammersbek

Example of application

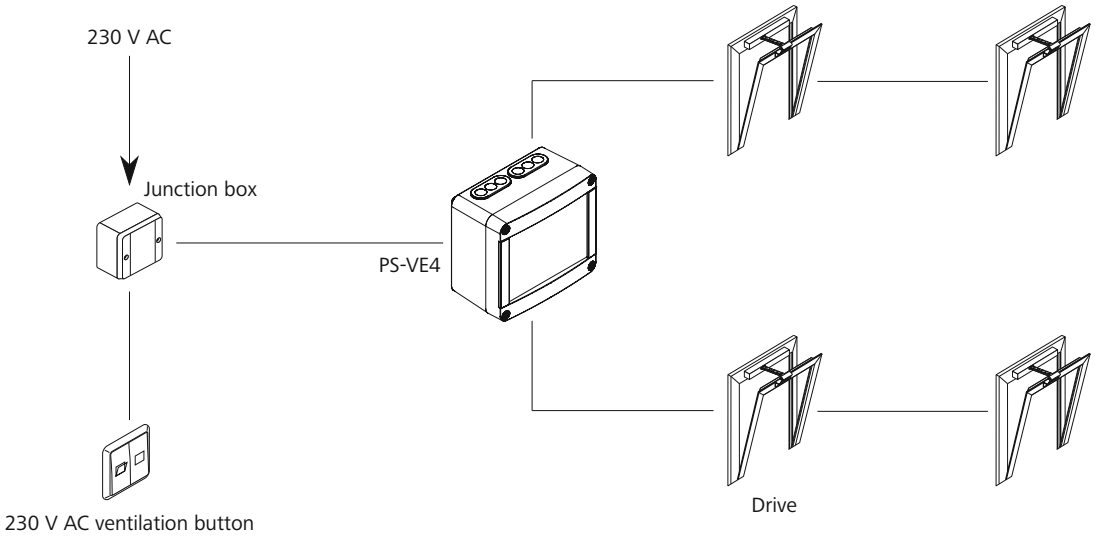

Technical data

	PS-VE4
Supply	230 V AC / +10 % ... -15 % / 50 Hz
Performance	144 W / 147 VA
Output	24 V DC / 4 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 50
Temperature range	0 °C ... +60 °C
Housing	Plastic
Colour	Light grey (~ RAL 7035)
W x H x D	172 x 151 x 95 mm
Weight	2.30 kg

Design

Type	Art. No.
PS-VE4	30.242.20