PS-VE6



Performance features

- External compact power supply unit, 230 V AC
- For controlling 24 V DC drives
- Up to 6 A total drive current
- Activation, e.g. using 230 V AC ventilation button
- Detection of high-speed function (high-speed, both input phases switched)
- High efficiency of 92 % at nominal current
- Surface-mounted design

Accessories

Operation elements




Weather sensors



We reserve the right to make changes.
©2020 D+H Mechatronic AG, Ammersbek

Example of application

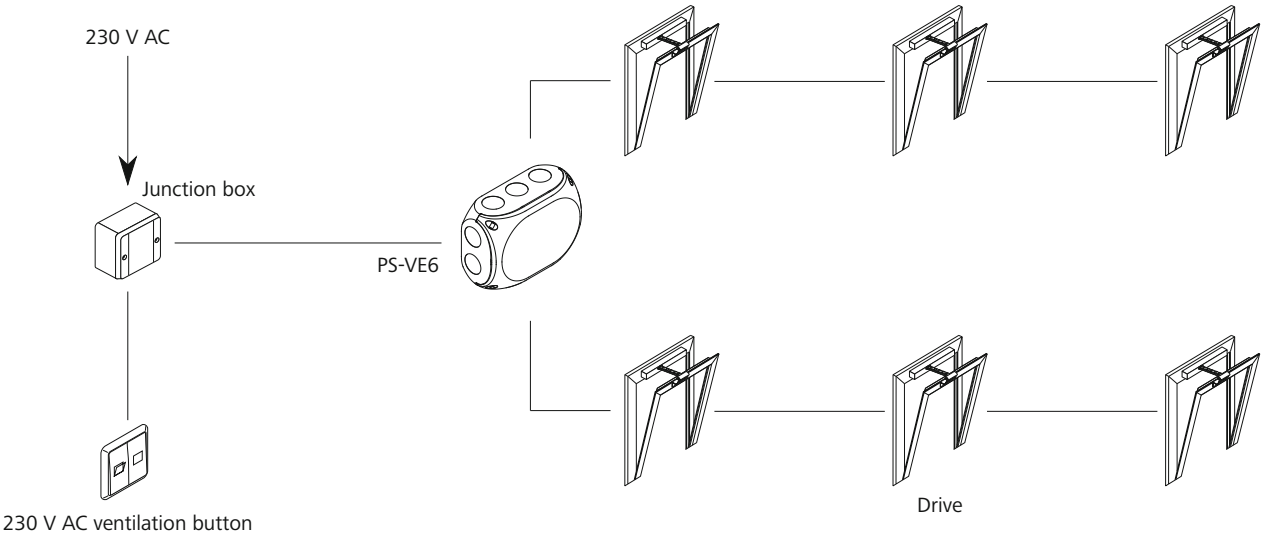

Technical data

	PS-VE6
Supply	230 V AC / +10 % ... -15 % / 50 ... 60 Hz
Performance	156 W / 165 VA
Output	24 V DC / 6 A
Mode of operation	Short-time duty 30 % duty cycle
Type of protection	IP 66
Temperature range	0 °C ... +60 °C
Housing	Polypropylene
Colour	Light grey (~ RAL 7035)
W x H x D	180 x 130 x 77 mm
Weight	0.60 kg

Design

Type	Art. No.
PS-VE6	30.242.30