

ACN-GW501-MRTU-0200



Performance features

- » Universal gateway for connecting AdComNet to a Modbus network
- » 200 user-configurable Modbus inputs (alarm, fault, LT)
- » 200 user-configurable Modbus outputs (alarm, fault, OPEN signal)
- » Ability to connect to other fields such as building management system or touch panel via Modbus
- » In case of defect in another segment, the functions within and below the segment stay intact
- » Power supply possible via SHEV control panel
- » Simple integration into the AdComNet network
- » Additional battery capacity of 1.2 Ah required

Accessories


Connection module



I/O module



Example of application

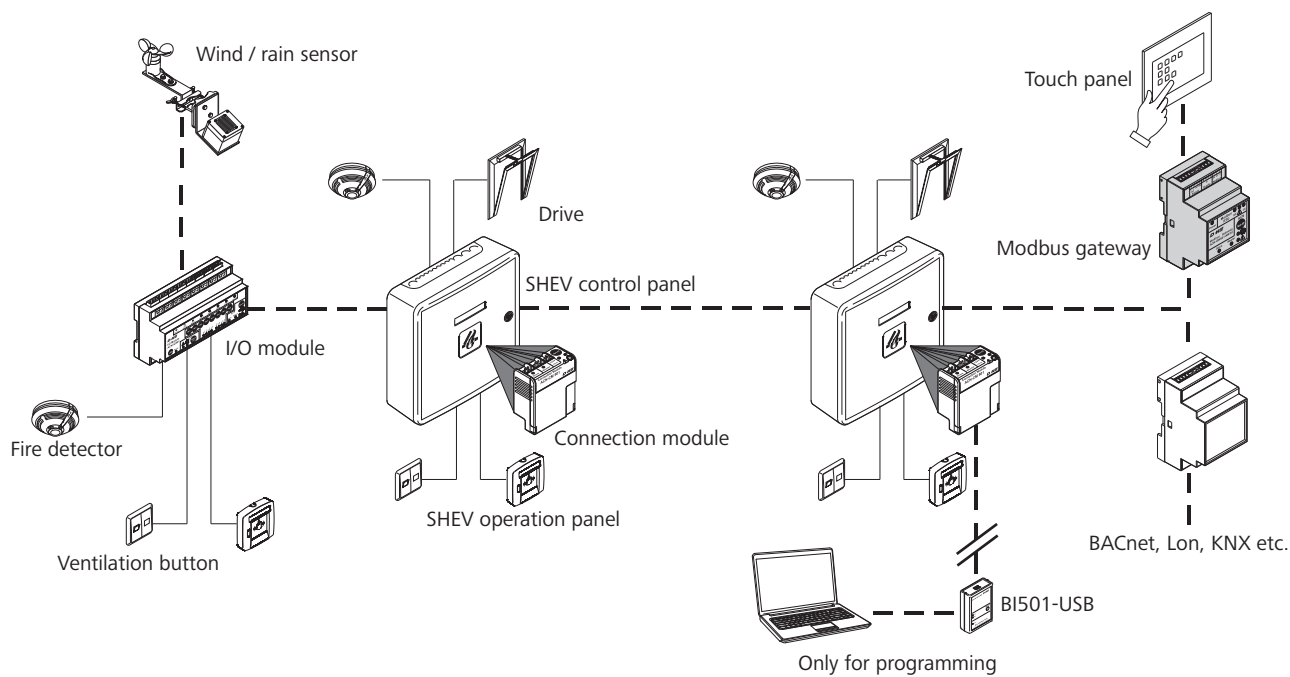

Design

Type	Art. No.	W x H x D	Weight
ACN-GW501-MRTU-0200	30.554.20	86 x 58 x 52 mm	0.12 kg